



Neus D NSD

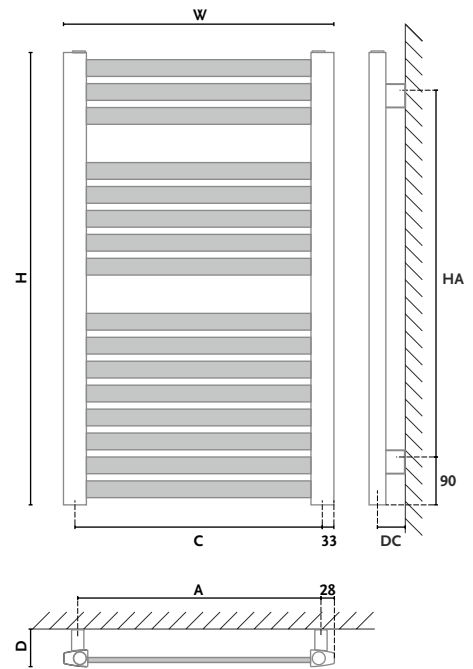

STANDARD

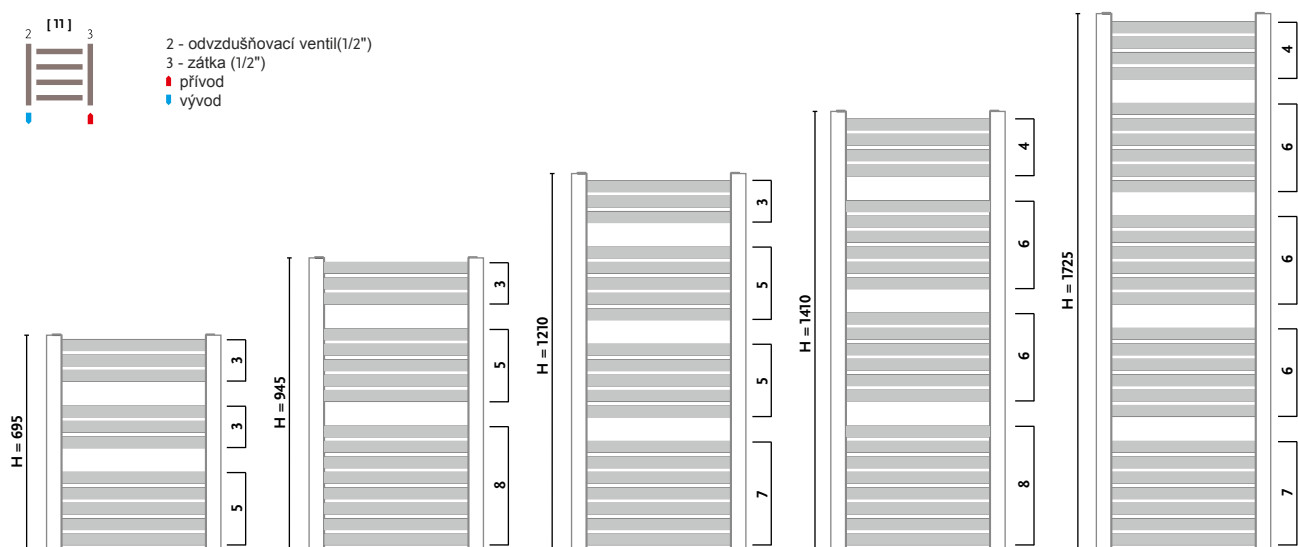

Neus D NSD	H [mm]	W [mm]	D [mm]	DC [mm]	C [mm]	A [mm]	HA [mm]	INDEKS	n	55/45/20°C [W]	75/65/20°C [W]	e [W]
NSD 7055	695	565	66	48	500	510	525	1013011110 1101	1,2400	174	328	300
NSD 9555	945	565	66	48	500	510	775	1013011120 1101	1,2400	237	447	300
NSD 12055	1210	565	66	48	500	510	1040	1013011130 1101	1,2400	304	572	300
NSD 14055	1410	565	66	48	500	510	1240	1013011140 1101	1,2400	354	667	600
NSD 17555	1725	565	66	48	500	510	1555	1013011150 1101	1,2400	434	817	600
NSD 9565	945	665	66	48	600	610	775	1013011160 1101	1,2400	279	526	300
NSD 12065	1210	665	66	48	600	610	1040	1013011170 1101	1,2400	358	674	600
NSD 14065	1410	665	66	48	600	610	1240	1013011180 1101	1,2400	417	785	600
NSD 17565	1725	665	66	48	600	610	1555	1013011190 1101	1,2400	505	961	900